

11-21-00

A

11/20/00

JC961 U.S. PTO

**UTILITY PATENT APPLICATION TRANSMITTAL  
(Large Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.  
03226.049001

Total Pages in this Submission

**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

THREAD SWITCH CIRCUIT DESIGN AND SIGNAL ENCODING FOR VERTICAL THREADING

and invented by:

Gajendra P. SINGH, Joseph I. CHAMDANI, Renu RAMAN and Rabin A. SUGUMAR

JC862 U.S. PTO

09/716545

11/20/00

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 21 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications *(if applicable)*
  - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
  - d. ☐ Reference to Microfiche Appendix *(if applicable)*
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings *(if drawings filed)*
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
03226.049001

Total Pages in this Submission

## Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal                      Number of Sheets 5
- b. ☐ Informal                      Number of Sheets \_\_\_\_\_
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy)                      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under  
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

## Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449                      ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class    ☒ Express Mail (Specify Label No.): E1521607228US

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
03226.049001

Total Pages in this Submission

## Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☐ Additional Enclosures (please identify below):

--

## Request That Application Not Be Published Pursuant To 35 U.S.C. 122(b)(2)

17. ☐ Pursuant to 35 U.S.C. 122(b)(2), Applicant hereby requests that this patent application not be published pursuant to 35 U.S.C. 122(b)(1). Applicant hereby certifies that the invention disclosed in this application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication of applications 18 months after filing of the application.

## Warning

**An applicant who makes a request not to publish, but who subsequently files in a foreign country or under a multilateral international agreement specified in 35 U.S.C. 122(b)(2)(B)(i), must notify the Director of such filing not later than 45 days after the date of the filing of such foreign or international application. A failure of the applicant to provide such notice within the prescribed period shall result in the application being regarded as abandoned, unless it is shown to the satisfaction of the Director that the delay in submitting the notice was unintentional.**

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
03226.049001

Total Pages in this Submission

## Fee Calculation and Transmittal

### CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	41	- 20 =	21	x \$18.00	\$378.00
Indep. Claims	3	- 3 =	0	x \$80.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$710.00
OTHER FEE (specify purpose) <u>Assignment</u>					\$40.00
TOTAL FILING FEE					\$1,128.00

- ☒ A check in the amount of **\$1,128.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **50-0591** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated:

11/22/00

Signature

Jonathan P. Osha, Reg. No. 33,986  
ROSENTHAL & OSHA L.L.P.  
700 Louisiana, Suite 4550  
Houston, TX 77002

CC:

Telephone: 713/228-8600  
Facsimile: 713/228-8778

**APPLICATION**  
**FOR**  
**UNITED STATES LETTERS PATENT**

**TITLE:**           **THREAD SWITCH CIRCUIT DESIGN AND  
SIGNAL ENCODING FOR VERTICAL  
THREADING**

**APPLICANT:**   **Gajendra P. SINGH  
Joseph I. CHAMDANI  
Renu RAMAN  
Rabin A. SUGUMAR**



**22511**

PATENT TRADEMARK OFFICE

"EXPRESS MAIL" Mailing Label Number: EL521607228US

Date of Deposit: November 20, 2000

## THREAD SWITCH CIRCUIT DESIGN AND SIGNAL ENCODING FOR VERTICAL THREADING

### BACKGROUND OF THE INVENTION

A modern computer system comprises a microprocessor, memory, and peripheral computer resources, i.e., monitor, keyboard, software programs, etc. The microprocessor comprises arithmetic, logic, and control circuitry that interpret and execute instructions from a computer program. Figure 1 shows a prior art diagram of an example of a computer's microprocessor (20) that has, among other components, a central processing unit ("CPU") (22), a memory controller (24), also known as a load/store unit, and on-board, or level 1, cache memory (26). The microprocessor (20) is connected to external, or level 2, cache memory (28), and the processor is also connected to the main memory (30) of the computer system. Cache memory is a region of fast memory that holds copies of data.

One goal of the computer system is to execute instructions provided by the computer's users and software programs. The execution of instructions is carried out by the CPU (22). Data needed by the CPU (22) to carry out an instruction are fetched by the memory controller (24) and loaded into the internal registers (32) of the CPU (22). Upon command from the CPU (22), the memory controller searches for data first in the fast on-board cache memory (26), then in the slower external cache memory (28), and if those searches turn out unsuccessful, then the memory controller (24) retrieves the data from the slowest form of memory, the main memory (30).

The time between a CPU request for data and when the data is retrieved and available for use by the CPU is referred to as the "latency" of the system. If requested data is found in cache memory, i.e., a data "hit" occurs, then the requested data can be accessed at the speed of the cache memory and the overall

latency of the system is decreased. On the other hand, if requested data is not found in the cache memory, i.e., a data “miss” occurs, then the data must be retrieved from the relatively slow main memory, and the overall latency of the system is increased.

5           Because the CPU runs at significantly greater speeds than either cache memory or main memory, a significant portion of the CPU’s time is spent waiting for data to be retrieved from one of the various forms of memory. In order to combat this performance-inhibiting phenomenon, various techniques have been employed to increase computing performance and efficiency. For example, many  
10       processors now incorporate superscalar architecture. Superscalar processors allow the simultaneous execution of multiple instructions. Additionally, processors now fetch multiple instructions, via an instruction fetch unit and an instruction scheduler, instead of executing one instruction and waiting for the next instruction to be fetched. A program sequence of instructions is referred to as a “process  
15       thread.”

          Another technique that has been employed to increase computer performance involves combining multiple processors into a single system. Each processor is capable of executing a particular sequence of instructions in a program or program segment. This technique is often referred to as “horizontal”  
20       multi-threading.

          An alternative processor performance enhancing technique is “vertical” multi-threading. Vertical multi-threading is a technique in which a single processing pathway, known as a “pipeline,” is used by more than one process thread. A capacity for vertical multi-threading exists because a process thread is  
25       not always actively executing. A process may be in a wait state awaiting either data or an event, such as a trap or interrupt. Because some applications have frequent cache misses, which result in heavy clock penalties, i.e., increased

latency, a most desirable condition is that a second process thread should utilize the processor while a first process thread is waiting for the arrival of data or an event.

For example, in data processing applications with frequent cache misses,  
5 data is accessed through a secondary memory storage structure, often the main memory, resulting in heavy clock penalties, i.e., higher latency. During data accessing delays, a beneficial usage of the pipeline is to allow a second process thread to execute. The second process thread can take over the idle pipeline by saving all useful states of the first process thread in some location and assigning  
10 new states to the new process thread. When the second process thread becomes idle and the first process thread returns to processing, saved states are returned to the pipeline and the pipeline resumes its execution of the first process thread.

Vertical multi-threading requires that states for the first process thread be saved in some location before execution of the second process thread.  
15 Additionally, states for the second process thread must be saved in some location before returning to the execution of the first process thread.

A vertical multi-threading processor includes one or more execution pipelines that are formed from a plurality of multiple-bit flip-flops (discussed below). The flip-flops contain multiple storage bits. These individual bits of the  
20 flip-flops store data for one of the many process threads that are in a pipeline at any given time. When an executing process thread halts due to a stall condition, such as a cache miss, an active bit of the multiple-bit flip-flop at that stage is correspondingly stalled, removed from activity on the pipeline, and a previously inactive bit becomes active for executing a previously inactive process thread.  
25 Vertical multi-threading is thus attained by inserting multiple-bit flip-flops at sequential stages in a pipeline.

Referring to Figure 2, a prior art multiple-bit flip-flop is shown. The



multiple-bit flip-flop (34) is an integrated circuit device that has two representative blocks: a header block (also known as the driver block) (36) and a data storage block (38). The header block (36) is coupled to the data storage block (38) and it drives, i.e., controls, the flip-flop block (38). The data storage block (38) comprises a plurality of storage elements that hold data for multiple process threads.

The input signals to the header block (36) include a clock (“**L4CLK**”) signal, a scan enable (“**SE**”) signal, and a clock enable (“**CE**”) signal. The header block (36) outputs a scan clock (“**SCLK**”) signal, an inverse scan clock (“**SCLK\_L**”) signal, a pulse clock (“**PCLK**”) signal, and an inverse pulse clock (“**PCLK\_L**”) signal. The output signals from the header block (36) serve as inputs to the data storage block (38) in addition to a data (“**DATA**”) and scan chain in (“**SI**”) signal which come from circuitry external to the multiple-bit flip-flop (34).

**L4CLK** is a timing signal that is generated from a CPU clock frequency. **L4CLK** is provided to be used as a time basis for the header block (36) in generating different timing signals to the data storage block (38). **SE**, the scan enable signal, is used by the header block (36) to determine when the multiple-bit flip-flop (34) should enter into a scan mode. The scan mode is necessary when the contents of the data within the data storage block (38) need to be scanned. When **SE** is asserted, the header block (36) pulses **SCLK** and **SCLK\_L** to indicate to the data storage block (38) to select the **SI** input and scan data using **SCLK** and **SCLK\_L** as time references.

**CE**, the clock enable signal, is used by the header block (36) to determine when the multiple-bit flip-flop (34) should operate in normal (non-scan) mode. When **CE** is asserted, the header block (36) pulses the **PCLK** and **PCLK\_L** to indicate to the data storage block (38) to select the **DATA** input and input data

using **PCLK** and **PCLK\_L** as time references. The above discussion regarding the scan mode and normal mode operations of the multiple-bit flip-flop (34) indicates that **SE** and **CE** are mutually exclusive and that only one can be asserted at any given time.

5 In order to facilitate vertical multi-threading using the multiple-bit flip-flop (34) with the discussed header block (36) and data storage block (38), a mechanism is needed to convey to the stages of the processor when to switch from one process thread to another process thread. The header block (36) comprises circuitry that is capable of driving a storage element in the data storage block (38)  
10 when selected by a switch while data in one or more storage elements that are not selected by the switch are held in their respective storage elements. This switch signal is generated by a state machine that is routed to different stages of the processor. Consequently, the signal for process thread switching is hard-wired into the CPU. Hard-wiring an additional signal into the CPU requires that the  
15 layout of the existing CPU be modified to accommodate the additional signal wire (or connection).

### SUMMARY OF THE INVENTION

In one aspect, the present invention relates to a method for implementing vertical multi-threading in a processor pipeline without significant architectural  
20 modifications to the pipeline. The vertical threading scheme uses multiple-bit flip-flops that require a thread switch signal in order to switch process threads as required by the vertical threading scheme. Because the multiple-bit flip-flops must be present at every stage in a pipeline, the invention by not requiring the implementation of additional signal wires external to the multiple-bit flip-flops,  
25 minimizes the amount of redesigning of processor architecture needed to implement vertical multi-threading.

In another aspect, the present invention relates to a method for increasing processor performance. By minimizing the amount of redesigning needed to implement vertical multi-threading, the invention encourages the implementation of vertical multi-threading, and therefore, the processor can execute more instructions in parallel and spend less time idle waiting for process thread dependencies. In effect, vertical threading increases process thread execution efficiency.

According to another aspect, the present invention relates to a method for combining multiple functionalities into one physical signal. The method further includes using the multi-function signal to determine what mode a multiple-bit flip-flop should operate in. The method further includes using the distinguishing characteristics of the multi-function signal to make a determination as to what function the multi-function signal serves at a given point in time in the processor pipeline.

In another aspect, the present invention relates to a method for converting an existing microprocessor without vertical threading into a processor with vertical threading with minimal changes to the existing processor.

Other aspects and advantages of the invention will be apparent from the following description and the appended claims.

## BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a prior art illustration of a microprocessor.

Figure 2 is a block diagram of a prior art multiple-bit flip-flop.

Figure 3 is a schematic block diagram of a multiple-bit flip-flop in accordance with an embodiment of the present invention.

Figure 4 is a circuit schematic of a header block of a multiple-bit flip-flop in accordance with an embodiment of the present invention.

Figure 5 is a timing diagram of the signals involved with a multiple-bit flip-flop in accordance with an embodiment of the present invention.

### DETAILED DESCRIPTION OF THE INVENTION

The present invention primarily relates to a method for using a single physical signal to denote multiple functionalities in a multiple-bit flip-flop. The multiple-bit flip-flop distinguishes between the multiple characteristics of the single physical signal to determine when operations should take place and what modes of operation should take place at a given point in time. By using a single physical wire for multiple functions, a process thread switch signal can be implemented without incorporating an additional wire into a microprocessor. Moreover, the method allows the microprocessor to achieve vertical multi-threading without redesigning the entire microprocessor.

Referring to Figure 3, a schematic block diagram of a multiple-bit flip-flop (40) is shown in accordance with one embodiment of the present invention. The figure illustrates that the multiple-bit flip-flop (40) comprises two representative blocks: a header, or clock/control, block (42) and a data storage block (44). The clock/control header block (42) supplies timing signals and process thread select/switch signals to the data storage block (44). The data storage block (44) comprises one or more storage elements (not shown). Typically, the storage elements are capable of storing data for a plurality of process threads.

Input signals to the clock/control header block (42) comprise a clock signal ("CLK"), which is a signal generated from circuitry external to the multiple-bit flip-flop (40), a multi-functioning signal ("SE\_CE\_L"), and a global thread identifier signal ("TID\_G") that is supplied from thread select circuitry external to the multiple-bit flip-flop (40). The clock/control header block (42) generates an internal flip-flop timing pulse signal ("PCLK"), the inverse of the internal flip-

flop timing pulse signal (“**PCLK\_L**”), a scan select signal (“**SCLK**”), and a local thread identifier signal (“**TID**”).

The **SCLK** signal is derived internally in the clock/control header block (42) using the external **CLK** signal. A combined scan enable and clock enable signal, **SE\_CE\_L**, is indirectly used to determine when **SCLK** should be asserted (discussed below). The clock/control header block (42) asserts an internally generated, local thread identifier signal (“**TID**”) to the data storage block (44) based on the global thread identifier signal, **TID\_G**. The clock/control header block (42) drives one or more data storage elements in the data storage block (44) dependent upon the mode of operation the multiple-bit flip-flop (40) is in and the behavior of **TID\_G**. Typically, the data storage block (44) comprises between 1 and 32 bistable multivibrator cells. However, those skilled in the art will appreciate that in alternative embodiments, more cells may be used.

The internal flip-flop timing pulse signal, **PCLK**, the inverse of the internal flip-flop pulse signal, **PCLK\_L**, the scan select signal, **SCLK**, and the internal, local thread ID signal, **TID**, are supplied from the clock/control header block (42) to the data storage block (44).

In addition to the internal flip-flop timing pulse signal, **PCLK**, the inverse of the internal flip-flop pulse signal, **PCLK\_L**, the scan select signal, **SCLK**, and the internal, local thread ID signal, **TID**, the data storage block (44) also receives a data input signal (“**DATA**”) and a scan chain input signal (“**SI**”) from circuitry external to the multiple-bit flip-flop (40).

A more detailed discussion regarding the functions and behaviors of the signals involved with the multiple-bit flip-flop (40) is given below with reference to Figure 5.

The present invention, by combining scan enable, clock enable, and clock disable functions into one signal wire, allows the microprocessor to be designed

without significant modifications to the processor area external to the multiple-bit flip-flop (40). Vertical multi-threading can be implemented with minimal changes to the processor with reference to area usage, number of transistors, and signal layout, because the essential process thread switch signal can be implemented using a wire that was devoted to a different function in the prior art. Therefore, an additional wire does not need to be implemented to incorporate the process thread switch function.

Referring to Figure 4, a circuit schematic is shown of the header block (42) of the multiple-bit flip-flop (40) in accordance with an exemplary embodiment of the present invention.

A clock signal, **CLK**, serves as an input to the header block (42). **CLK** is inputted into an inverter, **INV\_1** (100). **INV\_1** (100) inverts **CLK**, and then outputs the inverted **CLK** signal to a pass gate, **PASS\_1** (102), and a NOR gate, **NOR\_1** (106). **PASS\_1** (102) and another inverter, **INV\_2** (104), are used to delay a signal passing along the branch comprising **PASS\_1** (102) and **INV\_2** (104) relative to the signal passing directly from **INV\_1** (100) to **NOR\_1** (106). Additionally, **INV\_2** (104) outputs to an input of **NOR\_1** (106). **NOR\_1** (106) generates a pulse signal, **PULSE**, which is used by the circuitry in the header block (42) for operation timing references.

In an exemplary embodiment of the present invention, if **CLK** is initially low, then **INV\_1** (100) outputs high and an input to **NOR\_1** (106) is accordingly high since there is at least one direct signal path between **INV\_1** (100) and **NOR\_1** (106). Along the branch comprising **PASS\_1** (102) and **INV\_2** (104), **PASS\_1** (102) inputs the high signal from **INV\_1** (100) and selectively delays that high signal, i.e., generates a phase shift between the input signal to **PASS\_1** (102) and the output signal from **PASS\_1** (102). Then, **INV\_2** (104) inputs the signal from the output of **PASS\_1** (102) and inverts that signal. It follows that for this

exemplary embodiment, **INV\_2** (104) generates a low signal to an input of **NOR\_1** (106) since **INV\_2** (104) receives a high signal from **PASS\_1** (102). Next, **NOR\_1** (106) generates a low **PULSE** signal due to the fact that at least one input of **NOR\_1** (106) is high. In the case that **CLK** goes high from its initial low state, **INV\_1** (100) outputs a low signal and that low signal gets directly passed to **NOR\_1** (106). During the time interval in which the low signal from **INV\_1** (100) propagates to an input of **NOR\_1** (106) along the branch comprising **PASS\_1** (102) and **INV\_2** (104), both inputs to **NOR\_1** (106) are low since one input to **NOR\_1** (106) is low from the output of **INV\_1** (100) and an another input to **NOR\_1** (106) remains low from the time when **CLK** was low. During this interval in which all inputs to **NOR\_1** (106) are low, **NOR\_1** (106) generates a high **PULSE** signal. As the low signal from **INV\_1** (100) propagates through **PASS\_1** (102) and **INV\_2** (104), a high signal is generated by **INV\_2** (104) to an input of **NOR\_1** (106), wherein **NOR\_1** (106) then generates a low **PULSE** signal. In summary, when **CLK** goes high from a low state, **PULSE** goes from a low state to a high state back to a low state. In other words, **PULSE** is asserted high at rising edges of **CLK**.

The **SCAN\_READY\_L** node shown in Figure 4 is used by the header block (42) to determine when **PCLK** and **PCLK\_L** should be asserted. Connected to the **SCAN\_READY\_L** node is an inverter, **INV\_5** (134), which inverts the value on the **SCAN\_READY\_L** node and generates **SCAN\_READY**. The value on the **SCAN\_READY\_L** node is inputted into a NAND gate, **NAND\_1** (112). The value of **PULSE** also serves as an input to **NAND\_1** (112). When the value on **SCAN\_READY\_L** is high, **NAND\_1** (112) outputs the inverse value of **PULSE**. While the value on **SCAN\_READY\_L** is high and **PULSE** is pulsing, **NAND\_1** (112) generates a signal that pulses in accordance with **PULSE**. This pulsing signal serves as an input to a pass gate, **PASS\_3** (114),

and an inverter, **INV\_6** (116). **PASS\_3** (114) is used to balance the delay encountered by the pulsing signal passing through **INV\_6** (116) so that the inputs to the other inverters, **INV\_7** (115) and **INV\_8** (118), arrive at the same time at their respective gates. This is to ensure that **PCLK** and **PCLK\_L** are synchronous in their behavior, i.e., when **PCLK** is high, **PCLK\_L** is always low, and when **PCLK** is low, **PCLK\_L** is always high. Hence, when the value on the **SCAN\_READY\_L** node is high and **PULSE** is pulsing, **PCLK** pulses and **PCLK\_L** pulses inverse to the pulse of **PCLK**.

When the value on the **SCAN\_READY\_L** node is low, **NAND\_1** (112) generates a high signal, which in effect, via **PASS\_3** (114) and **INV\_7** (115), causes **PCLK** to be killed, i.e., the value of **PCLK** is held low.

A global thread identifier signal, **TID\_G**, serves as an input to the header block (42). **TID\_G** is inputted into an inverter, **INV\_3** (136), which inverts the **TID\_G** signal and passes it to a NMOS device, **NMOS\_1** (144), a PMOS device, **PMOS\_1** (126), a pass gate, **PASS\_2** (138), and to a local thread identifier output, **TID**. **PASS\_2** (138) inputs an incoming signal, selectively delays it, and outputs it to an inverter, **INV\_4** (140). **INV\_4** (140) then generates an output signal that is passed to another NMOS device, **NMOS\_2** (142), and a PMOS device, **PMOS\_2** (124).

In an exemplary embodiment of the present invention, if **TID\_G** goes from high to low, then **INV\_3** (136) outputs high. When the output of **INV\_3** (136) is high, **NMOS\_1** (144) is switched on. **PASS\_2** (138) inputs the high signal from **INV\_3** (136), delays it, and then passes it to **INV\_4** (140). During the delay between when **PASS\_2** (138) inputs the high signal and outputs the delayed high signal, **INV\_4** (140) outputs high since it outputted high when **TID\_G** was high. In other words, the delay generated by **PASS\_2** (138) causes the input of **INV\_4** (140) to not be immediately affected by a change in **TID\_G**. It follows that for



the relatively brief period of time that **INV\_4** (140) outputs high, both **NMOS\_1** (144) and **NMOS\_2** (142) receive high inputs. When the inputs to both **NMOS\_1** (144) and **NMOS\_2** (142) are high, **NMOS\_1** (144) and **NMOS\_2** (142) are both switched on, which, in effect, causes the value on the **SCAN\_READY\_L** node to go low. More specifically, when **NMOS\_1** (144) and **NMOS\_2** (142) are both 'on', a connection is created between the ground node directly connected with **NMOS\_2** (142) and the **SCAN\_READY\_L** node. However, as soon as **PASS\_2** (138) outputs the high signal it received from **INV\_3** (136) to **INV\_4** (140), **INV\_4** (140) outputs a low signal and accordingly **NMOS\_2** (142) switches 'off' causing an open circuit to be created between the ground node connected to **NMOS\_2** (142) and **NMOS\_1** (144). In summary, when **TID\_G** goes from high to low, **SCAN\_READY\_L** is driven low for one clock cycle, and this causes **PCLK** to be deactivated for one clock cycle (discussed above).

When **TID\_G** goes from low to high, **INV\_3** (136) outputs a low signal to **PMOS\_1** (126), **NMOS\_1** (144), **PASS\_2** (138), and **TID**. Since **INV\_3** (136) outputs a low signal to **NMOS\_1** (144), **NMOS\_1** (144) is 'off.' The low signal from **INV\_3** (136) also serves as an input to **PMOS\_1** (126). This low signal causes **PMOS\_1** (126) to turn 'on.' While the low signal from **INV\_3** (136) is being delayed by **PASS\_2** (138), an inverter, **INV\_4** (140) outputs low since it has not yet been affected by the change in **TID\_G**. The output of **INV\_4** (140) serves as an input to **PMOS\_2** (124). During the delay between when the low signal from **INV\_3** (136) inputs **PASS\_2** (138) and arrives at **INV\_4** (140), **PMOS\_2** (124) receives a low signal from **INV\_4** (140), which, in effect, causes **PMOS\_2** (124) to turn 'on.' When both **PMOS\_1** (126) and **PMOS\_2** (124) are 'on,' the input to an inverter, **INV\_9** (130), is driven high. **INV\_9** (130) then inverts the high signal and drives the value on the **SCAN\_READY\_L** node low. However, once **PASS\_2** (138) outputs the low signal it received from **INV\_3** (136), **INV\_4**

(140) outputs a high signal, which, in effect, switches **PMOS\_2** (124) 'off.' When **PMOS\_2** (124) is switched 'off,' the input to **INV\_9** (130) is driven low. Then, **INV\_9** (130) inverts the low signal and outputs a high signal such that the value on **SCAN\_READY\_L** node is unaffected by the output of **INV\_9** (130). The value on the **SCAN\_READY\_L** node also serves as input to another inverter, **INV\_10** (132). **INV\_10** (132) outputs to the input of **INV\_9** (130). In summary, when **TID\_G** goes from low to high, the value on the **SCAN\_READY\_L** node is driven low for one clock cycle causing **PCLK** to be killed for one clock cycle.

From the preceding discussion regarding **TID\_G**, an embodiment of the present invention requires that **PCLK** be deactivated for one clock cycle whenever **TID\_G** toggles, i.e., goes from high to low or from high to low.

**PULSE** is inputted into an inverter, **INV\_11** (120), which, in turn, outputs to the input of another inverter, **INV\_12** (122). Thereupon, **INV\_12** (122) generates **PULSE\_2**. When **PULSE** is asserted high, **PULSE\_2** goes high after a propagation delay due to a signal passing through **INV\_11** (120) and **INV\_12** (122). When **PULSE\_2** is high, an NMOS device, **NMOS\_3** (128) is switched 'on.' **PULSE\_2** is used to continuously reset the value on the **SCAN\_READY\_L** node, via **INV\_9** (130), to go high. Since **PULSE** always pulses as long as **CLK** is active, **PULSE\_2** also continuously pulses, and this causes **NMOS\_3** (128) to continuously turn 'on' and drive the value on the **SCAN\_READY\_L** node high. However, when **TID\_G** toggles before **PULSE\_2** goes high, the value on the **SCAN\_READY\_L** node is driven low (discussed above) and **PCLK** is deactivated. Yet as soon as **PULSE\_2** goes high, the value on the **SCAN\_READY\_L** node is driven high and **PCLK** is reactivated.

A multi-functioning signal, **SE\_CE\_L**, is inputted into the header block (42). **SE\_CE\_L** serves as an input to a NMOS device, **NMOS\_4** (146), another NMOS device, **NMOS\_5** (150), and a PMOS device, **PMOS\_3** (160). As soon as

**SE\_CE\_L** goes high, **NMOS\_4** (146) switches 'on,' and the value on the **SCAN\_READY\_L** node is driven low since there is a ground terminal connected directly to **NMOS\_4** (146). Correspondingly, when **SCAN\_READY\_L** is low, **PCLK** is deactivated. If **SE\_CE\_L** goes from high to low before the end of a cycle, then **PULSE\_2** will reset the value on the **SCAN\_READY\_L** node to high, and **PCLK** will be reactivated.

However, in the case that **SE\_CE\_L** remains high for more than one cycle, **NMOS\_5** (150) will be switched 'on.' When **PULSE\_2** goes high, another NMOS device, **NMOS\_6** (148), switches 'on' causing the ground terminal connected directly to **NMOS\_5** (150) to connect with an input to an inverter, **INV\_13** (162). It follows that when **NMOS\_5** (150) and **NMOS\_6** (148) are both on, **INV\_13** (162) will output a high value on a **SCAN\_MODE** node. In other words, when **SE\_CE\_L** is high for more than one cycle, **SCAN\_MODE** goes high. If and when **SE\_CE\_L** goes low, **NMOS\_4** (146) switches 'off' and **PMOS\_3** (160) switches 'on.' When **PMOS\_3** (160) switches 'on,' there is a direct connection between the power terminal connected to **PMOS\_3** (160) and the input to **INV\_13** (162). In this case, when the input to **INV\_13** (162) is high, **INV\_13** (162) outputs a low value on the **SCAN\_MODE** node. Another inverter, **INV\_14** (164) inputs the value on the **SCAN\_MODE** node and outputs to a node connecting **PMOS\_3** (160) and **NMOS\_6** (148).

In summary, with regard to **SE\_CE\_L** in this exemplary embodiment, when **SE\_CE\_L** is high, **PCLK** is deactivated. If **SE\_CE\_L** is high for less than one cycle, then **PULSE\_2** resets the value on the **SCAN\_READY\_L** node to high at the end of the cycle in which **SE\_CE\_L** went high and **PCLK** is reactivated. However, if **SE\_CE\_L** is high for more than one cycle, then **SCAN\_MODE** goes high and remains high until **SE\_CE\_L** goes low.

The value of **SCAN\_MODE** also serves as an input to a NAND gate,

**NAND\_2** (108). **NAND\_2** (108) also inputs **PULSE**. If **SCAN\_MODE** is low, then **NAND\_2** (108) outputs high to an inverter, **INV\_15** (110), which in turn inverts the low **SCAN\_MODE** signal and generates a low **SCLK** signal. However, when **SCAN\_MODE** is high, **NAND\_2** (108) generates a pulsing signal according to the behavior of **PULSE**. This pulsing signal is inverted by **INV\_15** (110), and **INV\_15** (110), in turn, generates a pulsing **SCLK** signal. In summary, in this exemplary embodiment, when **SCAN\_MODE** is low, **SCLK** remains deactivated. However, when **SCAN\_MODE** is high, **SCLK** is activated and pulse in accordance to **PULSE**.

Referring to Figure 5, a timing diagram of the signals involved with the header block (42) of the multiple-bit flip-flop (40) is shown in accordance with an embodiment of the present invention.

The **CLK** signal is the constant time reference for the header block (42). **CLK** is derived from the CPU clock, and the region between one rising edge in the signal to the next rising edge in the signal constitutes one complete clock cycle. The **CLK** signal will remain constant regardless of changes to any of the signals depicted in Figure 5.

The local **TID** signal is generated by the clock/control header block (42) using the **TID\_G** signal (shown in Figure 3) to determine when a particular data storage element within the data storage block (44) should switch processes threads. The local **TID** signal, also known as the thread switch signal, is asserted through a toggle whenever the signal goes from high to low or low to high. For instance, in the exemplary embodiment of the present invention shown in Figure 5, the local **TID** signal is activated twice, meaning that this exemplary embodiment requires the particular storage element in the data storage block (44) to change process threads twice. The process thread switching in Figure 5 occurs in **cycle 2** when the local **TID** signal goes from logic low to logic high and in **cycle 4** when

**TID** goes from logic high to logic low.

The **PCLK** signal in Figure 5 represents a clock reference for the data storage block (44). **PCLK** is derived from the **CLK** signal through the clock/control header block (42). The **PCLK** signal has a rising edge synchronous to the rising edge of the **CLK** signal. **PCLK** is used as the clock reference when the multiple-bit flip-flop (40) is in normal mode.

The **SE\_CE\_L** signal represents the combined scan enable, clock enable, and clock disable functions. Although, **SE\_CE\_L** is implemented using one physical wire and shown in Figure 5 as one waveform, those skilled in the art will appreciate that **SE\_CE\_L** performs multiple functions (discussed below).

The **SCAN\_READY** and **SCAN\_MODE** signals in Figure 5 are internal signals within the clock/control header block (42) and do not get passed to the data storage block (44). These signals are entirely internal to the clock/control header block (42) and serve to distinguish what particular mode the multiple-bit flip-flop (40) should operate in. **SCAN\_READY** serves as an intermediary signal between when **SE\_CE\_L** indicates that the multiple-bit flip-flop (40) should operate in scan mode and when the multiple-bit flip-flop (40) actually begins to operate in scan mode.

The **SCLK** signal in Figure 5 represents the scan select pulse. The **SCLK** signal pulses when **SCAN\_MODE** goes high. In other words, once the multiple-bit flip-flop (40) is in a scan mode based on **SCAN\_MODE** going or being high, **SCLK** serves as the time reference for data scan operations within the data storage block (44). Additionally, when **SCAN\_MODE** is asserted and **SCLK** begins to pulse, **SI** is selected by the data storage block (44) and used by the data storage block (44) for its scan operations.

The clock/control header block (42) comprises circuitry which is able to distinguish between the different functionalities of **SE\_CE\_L**. **SE\_CE\_L** can

serve as a scan enable function, a clock enable function, and a clock disable function. Therefore, the behavior of the multi-functioning **SE\_CE\_L** signal must exhibit multiple functionalities that are decipherable and usable by the clock/control header block (42). Those skilled in the art will appreciate that in  
5 other embodiments, **SE\_CE\_L**, or another type of single physical signal, may be used for other functions.

The local **TID** signal, shown in the exemplary embodiment of the present invention in Figure 5, toggles, i.e., signal goes from logic high to logic low or from logic low to logic high, to indicate to the data storage block (44) that it needs  
10 to switch process threads. A toggle is recognized only if it has completed toggling before **CLK** goes high in a particular cycle. As shown in Figure 5, **TID** toggles in **cycle 2** before **CLK** goes high. Likewise, in **cycle 4**, local **TID** toggles before **CLK** goes high. Furthermore, when local **TID** toggles, the **PCLK** signal is deactivated. In Figure 5, the points (50,52) represent cycles in which **PCLK** has  
15 been deactivated due to local **TID** toggles. Because the local **TID** toggle represents process thread switches, the **PCLK** must be deactivated in order to stop reading data while the data storage block (44) is switching process threads. For example, in the embodiment of the present invention shown in Figure 5, the local **TID** toggles (from logic low to logic high) in **cycle 2**. Thereafter, the **PCLK**  
20 signal is deactivated so that data is not read while the data storage block (44) is switching process threads. By the end of **cycle 3**, the data storage block (44) is ready to read data for the new process thread, and therefore **PCLK** goes high to indicate to the data storage block (44) that it can read in data if needed. In **cycle 4**, the local **TID** toggles again (from logic high to logic low), and thereafter **PCLK** is  
25 deactivated while the data storage block (44) changes process threads so that data is not read in during the process thread change. By the end of **cycle 5**, the data storage block (44) is ready to perform normal data operations.

The multi-functioning **SE\_CE\_L** signal, shown in Figure 5, exhibits scan enable, clock enable, and clock disable functions. The main purpose of a scan enable function, which is asserted in a scan mode, is to allow the user or user software to debug the software and/or hardware systems of the computer by allowing data and storage information to be scanned or seen. Typically, scan enable functionality is implemented so that it must be actively propagated for a plurality of CPU cycles in order to enter into the scan mode.

When the **SE\_CE\_L** signal goes high, the **PCLK** signal is deactivated in the cycle immediately following the cycle in which **SE\_CE\_L** goes high because when **SE\_CE\_L** goes high, this indicates to the clock/control header block (42) that the multiple-bit flip-flip (40) might enter a scan mode, and therefore, the data storage block (44) must stop using **PCLK** as its time reference. When **SE\_CE\_L** goes high, **SCAN\_READY**, which is internal to the clock/control header block (42), goes high in the cycle immediately following the cycle in which **SE\_CE\_L** went high. If **SE\_CE\_L** goes low, then **SCAN\_READY** accordingly goes low. However, when **SE\_CE\_L** goes low, **SCAN\_READY** does not wait until the end of the cycle in which **SE\_CE\_L** went low in order to recognize the change in **SE\_CE\_L**. Once **SE\_CE\_L** goes low, **SCAN\_READY** follows accordingly with minimal lag.

If **SCAN\_READY** remains high at the end of the cycle in which it went high, then this indicates that **SE\_CE\_L** has remained high for more than one cycle, and therefore, **SE\_CE\_L** functions as a scan enable signal. When **SCAN\_READY** is high at the end of the cycle in which it went high, the clock/control header block (42) circuitry asserts **SCAN\_MODE**. The assertion of **SCAN\_MODE** causes **SCLK** to begin pulsing and this indicates to the data storage block (44) that it should operate in scan mode.

To summarize, when **SE\_CE\_L** remains high for more than once cycle, the

**SE\_CE\_L** signal functions as a scan enable signal, and the data storage block (44) enters scan mode based using **SCLK** as its time reference. The assertion of **SCLK** is dependent upon when **SCAN\_MODE** goes high, and **SCAN\_MODE** is dependent upon **SCAN\_READY**, which in turn is dependent upon **SE\_CE\_L**.

Referring to Figure 5, the **SE\_CE\_L** signal goes high in cycle 6. In cycle 7, the cycle immediately following the cycle in which **SE\_CE\_L** went high, **SCAN\_READY** goes high and **PCLK** is deactivated (54). However, **SE\_CE\_L** goes low in cycle 7, and therefore **SCAN\_READY** follows accordingly and goes low. Therefore, **SCAN\_MODE** is not asserted because **SCAN\_READY** is not high at the end of the cycle in which it went high. Moreover, **PCLK** is reactivated at the end of cycle 7 since **SE\_CE\_L** is not high at the end of cycle 7.

**SE\_CE\_L** also goes high in cycle 8. In cycle 9, which immediately follows the cycle in which **SE\_CE\_L** went high, **SCAN\_READY** goes high and **PCLK** is deactivated (56). **SE\_CE\_L** remains high at the end of cycle 9, and therefore, **SCAN\_READY** accordingly remains high at the end of cycle 9 and **PCLK** remains deactivated (low) (58). At the end of cycle 9, the clock/control header block (42) recognizes that **SCAN\_READY** remains high at the end of the cycle in which it went high, and therefore, since **SE\_CE\_L** has been high for more than one cycle, **SE\_CE\_L** functions as a scan enable signal and **SCAN\_MODE** is asserted in cycle 10. Correspondingly, **SCLK** begins to pulse in cycle 10, and this drives the data storage block (44) to suspend normal operations, select **SI**, and operate in scan mode. At the end of cycle 10, **SE\_CE\_L** remains high, and therefore, **PCLK** remains deactivated, **SCAN\_READY** remains high, and **SCAN\_MODE** and **SCLK** continue to be asserted.

**SE\_CE\_L** also functions as a clock enable signal. The clock enable function of **SE\_CE\_L** is an active low function, meaning that the clock enable function is asserted when the signal is low. When **SE\_CE\_L** is low at the rising



edge of a cycle and given that a toggle has not occurred in the previous cycle, **SE\_CE\_L** serves as a clock enable signal. The clock enable function indicates to the clock/control header block (42) to operate the multiple-bit flip-flop (40) in normal mode and provide **PCLK** to the data storage block (44) as its time  
5 reference for performing normal data operations.

Referring to Figure 5, **SE\_CE\_L** is low at the rising edges of **cycle 1** and **cycle 2**, and therefore, it operates as a clock enable signal and **PCLK** is asserted in **cycle 1** and **cycle 2**. At the rising edge of **cycle 3**, **PCLK** is deactivated (50) due to the **TID** toggle in **cycle 2** (discussed above). At the rising edge of **cycle 4**,  
10 **PCLK** is asserted due to **SE\_CE\_L** being low and **TID** not toggling in **cycle 3**. Although, **SE\_CE\_L** is low at the rising edge of **cycle 5**, **PCLK** is deactivated (52) due to the **TID** toggle in **cycle 4**. At the rising edge of **cycle 6**, **SE\_CE\_L** is low, and because there is no **TID** toggle in the previous cycle, **PCLK** is asserted.

At the rising edge of **cycle 7**, **SE\_CE\_L** is high, and accordingly, **PCLK** is  
15 deactivated. In **cycle 7**, **SE\_CE\_L** goes low. Because **SE\_CE\_L** is high for less than one complete cycle, **SE\_CE\_L** does not serve as a scan enable signal. Instead, when **SE\_CE\_L** pulses high for less than one cycle, **SE\_CE\_L** functions as a clock disable function since it deactivates **PCLK** for one cycle. The clock disable function allows for the deactivation of **PCLK** for one cycle in order to  
20 perform flip-flop alignment operations.

One advantage of the present invention is that **SE\_CE\_L** can function as one of a plurality of signals. **SE\_CE\_L**, which is one physical signal, is capable of functioning as multiple signals. Because **SE\_CE\_L** is used as a multi-functioning signal, additional signal wires do not to be designated for the signals  
25 that are represented by **SE\_CE\_L**.

Another advantage is that vertical multi-threading, which requires a thread switch control signal, can be implemented within a microprocessor without

additional wires. This results from the fact that because SE\_CE\_L is used for multiple functions, the thread switch control signal can use a pre-existing signal wire which was previously used as a signal that is now represented using SE\_CE\_L. This is desirable because if additional signal wires need to be  
5 implemented in the microprocessor, the circuitry of the entire microprocessor must be taken out and redesigned.

Another advantage of the present invention is that the circuitry within the clock/control header block (discussed above) takes up an equal or lesser amount of space than a clock/control header block which does not have the capability of  
10 using the multi-functioning signal.

Another advantage of the present invention is that it encourages vertical multi-threading, and, in effect, promotes increased processor performance. Because the multiple-bit flip-flops require no additional signals from the processor, a plurality of multiple-bit flip-flops can be placed at every stage of a  
15 processor pathway. As mentioned above, the multiple-bit flip-flops allow for efficient vertical multi-threading, and therefore increase processor throughput.

While the invention has been described with respect to a limited number of embodiments, those skilled in the art will appreciate that other embodiments can be devised which do not depart from the scope of the invention as disclosed  
20 herein. Accordingly, the scope of the invention should be limited only by the attached claims.

## CLAIMS

What is claimed is:

- 1 1. A system for implementing vertical threading in a processor, comprising:  
2 a header block that receives a multi-function signal and generates a  
3 plurality of signals using the multi-function signal; and  
4 a data storage block that is responsive to the plurality of signals  
5 generated by the header block.
- 1 2. The system of claim 1, wherein the header block comprises header circuitry  
2 which distinguishes between different functionalities exhibited by the  
3 multi-function signal.
- 1 3. The system of claim 1, wherein the multi-function signal comprises a scan  
2 enable function, a clock enable function, and a clock disable function.
- 1 4. The system of claim 1, wherein the header block receives signals in  
2 addition to the multi-function signal.
- 1 5. The system of claim 4, wherein the additional signals received by the  
2 header block comprise a clock input signal and a global thread identifier  
3 signal.
- 1 6. The system of claim 5, wherein the global thread identifier signal is used by  
2 the processor to selectively indicate to the header block that the data storage  
3 block needs to switch process threads.

- 1 7. The system of claim 5, wherein the clock input signal is generated by the  
2 processor and is used by the header block to determine time references for  
3 operations in the header block.
- 1 8. The system of claim 1, wherein the plurality of signals generated by the  
2 header block comprise an external pulse signal, an inverted external pulse  
3 signal, a scan clock signal, and a local thread identifier signal.
- 1 9. The system of claim 8, wherein the external pulse signal is used by the data  
2 storage block as a time reference for operations in a normal mode.
- 1 10. The system of claim 8, wherein the inverted external pulse signal is an  
2 inverse of the external pulse signal, and wherein the inverted external pulse  
3 signal is used by the data storage block to facilitate operations in a normal  
4 mode.
- 1 11. The system of claim 8, wherein the scan clock signal is used by the data  
2 storage block as a time reference for operations in a scan mode.
- 1 12. The system of claim 8, wherein the local thread identifier signal is  
2 generated by the header block using a global thread identifier signal.
- 1 13. The system of claim 1, wherein the data storage block receives the plurality  
2 of signals generated by the header block, and wherein the header block and  
3 the data storage block are part of a multiple-bit flip-flop, and wherein the  
4 multiple-bit flip-flop is used in a processor pipeline.

- 1 14. The system of claim 13, wherein the processor pipeline comprises a  
2 plurality of multiple-bit flip-flops.
- 1 15. The system of claim 1, wherein the data storage block comprises at least  
2 one data storage element that is capable of storing data for a plurality of  
3 process threads.
- 1 16. The system of claim 1, wherein the header block controls a plurality of  
2 modes in which the data storage block may operate, and wherein the multi-  
3 function signal comprises additional functions.
- 1 17. A method for implementing vertical threading, comprising:  
2 receiving a multi-function signal in a header block;  
3 determining which function the multi-function signal serves;  
4 generating signals within and from the header block according to the  
5 determination; and  
6 operating a multiple-bit flip-flop in one of a plurality of operation  
7 modes dependent upon the determination of which function  
8 the multi-function signal serves.
- 1 18. The method of claim 17, wherein the multi-function signal can serve as a  
2 scan enable function, a clock enable function, and a clock disable function.
- 1 19. The method of claim 17, wherein the signals generated from the header  
2 block are received by a data storage block.

1 20. The method of claim 19, wherein the data storage block operates in one of  
2 the plurality of operation modes dependent upon the signals generated from  
3 the header block.

1 21. The method of claim 17, wherein the determination of which mode to  
2 operate the multiple-bit flip-flop comprises:  
3 distinguishing between multiple characteristics of the multi-function  
4 signal;  
5 using the multi-function signal to generate intermediary signals; and  
6 using the intermediary signals to determine when the multiple-bit  
7 flip-flop should go into or remain in one of the plurality of  
8 operation modes.

1 22. The method of claim 21, wherein the intermediary signals are internal to  
2 the header block, and wherein the plurality of operation modes comprise a  
3 normal mode and a scan mode.

1 23. The method of claim 18, wherein the determination that the multi-function  
2 signal serves as the scan enable function indicates that the multiple-bit flip-  
3 flop should operate in a scan mode, and wherein the determination that the  
4 multi-function signal serves as the clock enable function indicates that the  
5 multiple-bit flip-flop should operate in a normal mode.

1 24. The method of claim 18, wherein the determination that the multi-function  
2 signal serves as the clock disable function indicates that the multiple-bit  
3 flip-flop should temporarily suspend normal mode data operations for  
4 alignment purposes.

1 25. The method of claim 17, further comprising:  
2 inputting a first clock signal;  
3 inputting the multi-function signal;  
4 inputting a global thread identifier signal; and  
5 selectively generating an external pulse signal, a scan clock signal,  
6 and a local thread identifier signal dependent upon the  
7 behavior of the pulse signal, the multi-function signal, and the  
8 global thread identifier signal.

1 26. The method of claim 25, further comprising:  
2 generating an internal pulse signal using the first clock signal; and  
3 using the internal pulse signal to activate the external pulse signal  
4 when the multi-function signal serves as a clock enable  
5 function.

1 27. The method of claim 25, further comprising:  
2 deactivating the external pulse signal when the multi-function signal  
3 begins to serve as a scan enable function.

1 28. The method of claim 25, further comprising:  
2 activating the external pulse signal at an end of a clock cycle in  
3 which the multi-function signal begins to serve as a scan  
4 enable function when the multi-function signal begins to  
5 serve as a clock enable function before the end of the clock  
6 cycle.

1 29. The method of claim 25, further comprising:

2                   deactivating the external pulse signal when the multi-function signal  
3                   serves as a scan enable function for more than one clock  
4                   cycle.

1    30.    The method of claim 27, wherein the multiple-bit flip-flop operates in a  
2           scan mode when the multi-function signal serves as the scan enable  
3           function for more than one cycle.

1    31.    The method of claim 30, further comprising:  
2            activating the scan clock signal when the multiple-bit flip flop is in  
3            the scan mode.

1    32.    The method of claim 25, further comprising:  
2            deactivating the external pulse signal when the global thread  
3            identifier signal toggles;  
4            selectively generating the local thread identifier signal when the  
5            global thread identifier signal toggles; and  
6            activating the external pulse signal at an end of a clock cycle in  
7            which the global thread identifier signal toggled.

1    33.    The method of claim 25, wherein the external pulse signal, the scan clock  
2           signal, and the local thread identifier signal are received by the data storage  
3           block, and wherein additional signals are selectively generated to the data  
4           storage block.

1    34.    The method of claim 25, wherein the multiple-bit flip-flop operates in a  
2           normal mode when the external pulse signal is activated.



1 35. The method of claim 17, further comprising:  
2 converting an existing processor without vertical threading into a  
3 processor with vertical threading without changing an  
4 architectural layout of the existing processor.

1 36. An apparatus for implementing a vertical threading scheme, comprising:  
2 means for inputting a clock signal;  
3 means for inputting a multi-function signal;  
4 means for inputting a global thread identifier signal;  
5 means for distinguishing between different functionalities of the  
6 multi-function signal to determine which of a plurality of  
7 functions the multi-function serves; and  
8 means for generating a plurality of signals based on the  
9 determination of which of the plurality of functions the multi-  
10 function serves, the clock signal, and the global thread  
11 identifier signal.

1 37. The apparatus of claim 36, wherein the plurality of signals comprises an  
2 external pulse signal, an inverted external pulse signal, a scan clock signal,  
3 and a local thread identifier signal.

1 38. The apparatus of claim 37, further comprising:  
2 means for generating an internal pulse signal based on the behavior  
3 of the clock signal;  
4 means for using the internal pulse signal as a time reference for  
5 operations;

6 means for using the internal pulse signal to generate the external  
7 pulse signal; and  
8 means for using the internal pulse to generate the inverted external  
9 pulse signal.

1 39. The apparatus of claim 37, further comprising:

2 means for deactivating the external pulse signal when the global  
3 thread identifier signal toggles;  
4 means for reactivating the external pulse signal at an end of a cycle  
5 in which the global thread identifier signal toggled; and  
6 means for using the global thread identifier signal to generate the  
7 local thread identifier signal.

1 40. The apparatus of claim 37, further comprising:

2 means for deactivating the external pulse signal when the multi-  
3 function signal begins to serve as a scan enable function;  
4 means for reactivating the external pulse signal dependent upon  
5 whether the multi-function signal stopped serving as a scan  
6 enable function before an end of a clock cycle in which the  
7 multi-function signal began serving as the scan enable  
8 function; and  
9 means for activating a scan clock signal when the multi-function  
10 signal serves as the scan enable function for more than one  
11 clock cycle.


1 41. The apparatus of claim 36, further comprising:

2 means for activating an internal scan ready signal at a beginning of a  
3 clock cycle immediately following a previous clock cycle in  
4 which the multi-function signal began serving as a scan  
5 enable function; and  
6 means for deactivating the internal scan ready signal when the multi-  
7 function signal stops serving as the scan enable function.

## THREAD SWITCH CIRCUIT DESIGN AND SIGNAL ENCODING FOR VERTICAL THREADING

### ABSTRACT

A method and apparatus for implementing vertical multi-threading in a microprocessor without implementing additional signal wires in the processor has been developed. The method uses a pre-existing signal to serve as a multi-  
5 function signal such that the multi-function signal can be used for clock enable, clock disable, and scan enable functions. The single multi-function signal exhibits multiple functionalities as needed by a flip-flop to operate in a plurality of modes. The method allows for the use of a pre-existing signal wire to be used as a process thread switch signal that would otherwise have to be explicitly hard-wired in the  
10 absence of the multi-functioning signal. The method further includes allowing multiple-bit flip-flops to be placed at sequential stages in a pipeline in order to facilitate vertical multi-threading and, in effect, increase processor performance. The apparatus provides means for distinguishing between specific characteristics exhibited by the multi-function signal. The apparatus further provides means for  
15 generating intermediary signals within a control block and then generating output signals to a data storage block. The apparatus also involves generating timing signals to a plurality of flip-flops dependent upon the behavior of the multi-function signal.

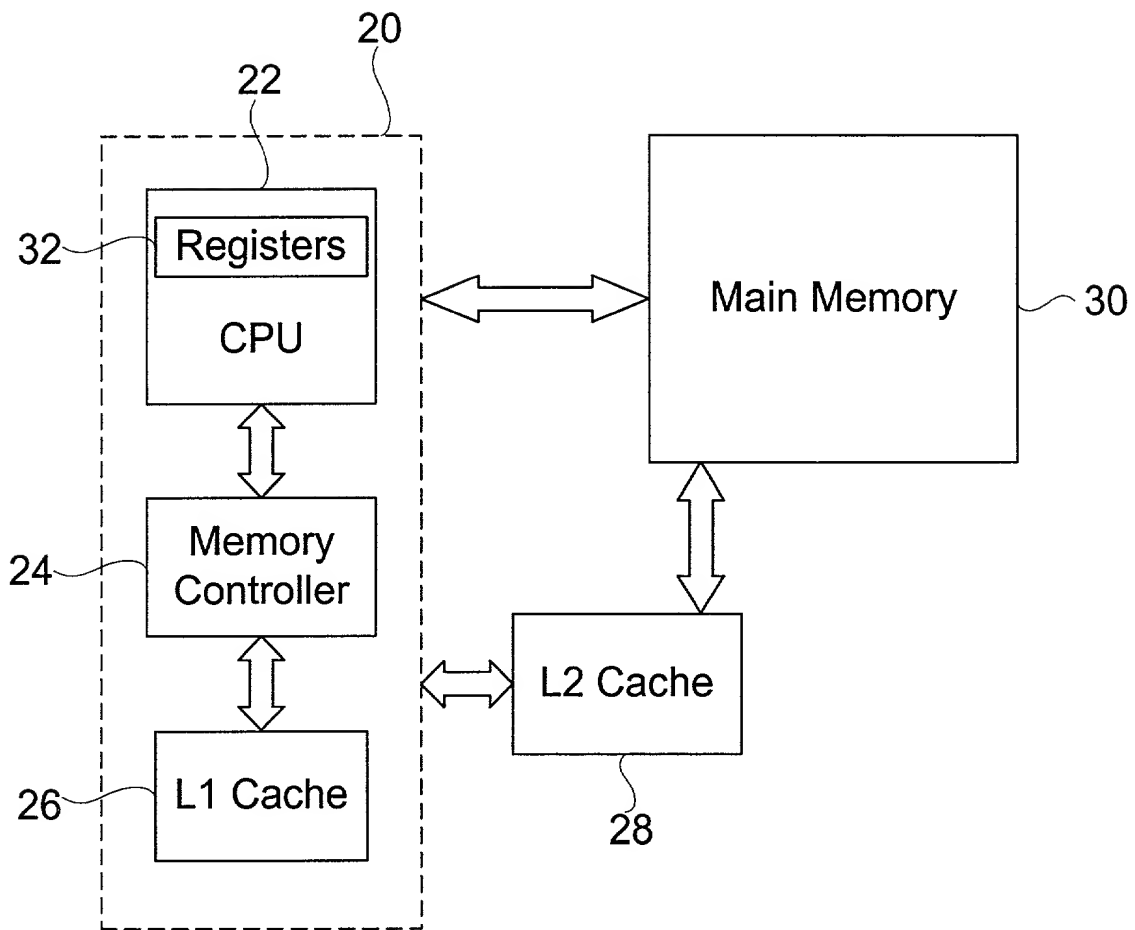

**Figure 1**  
**(Prior Art)**


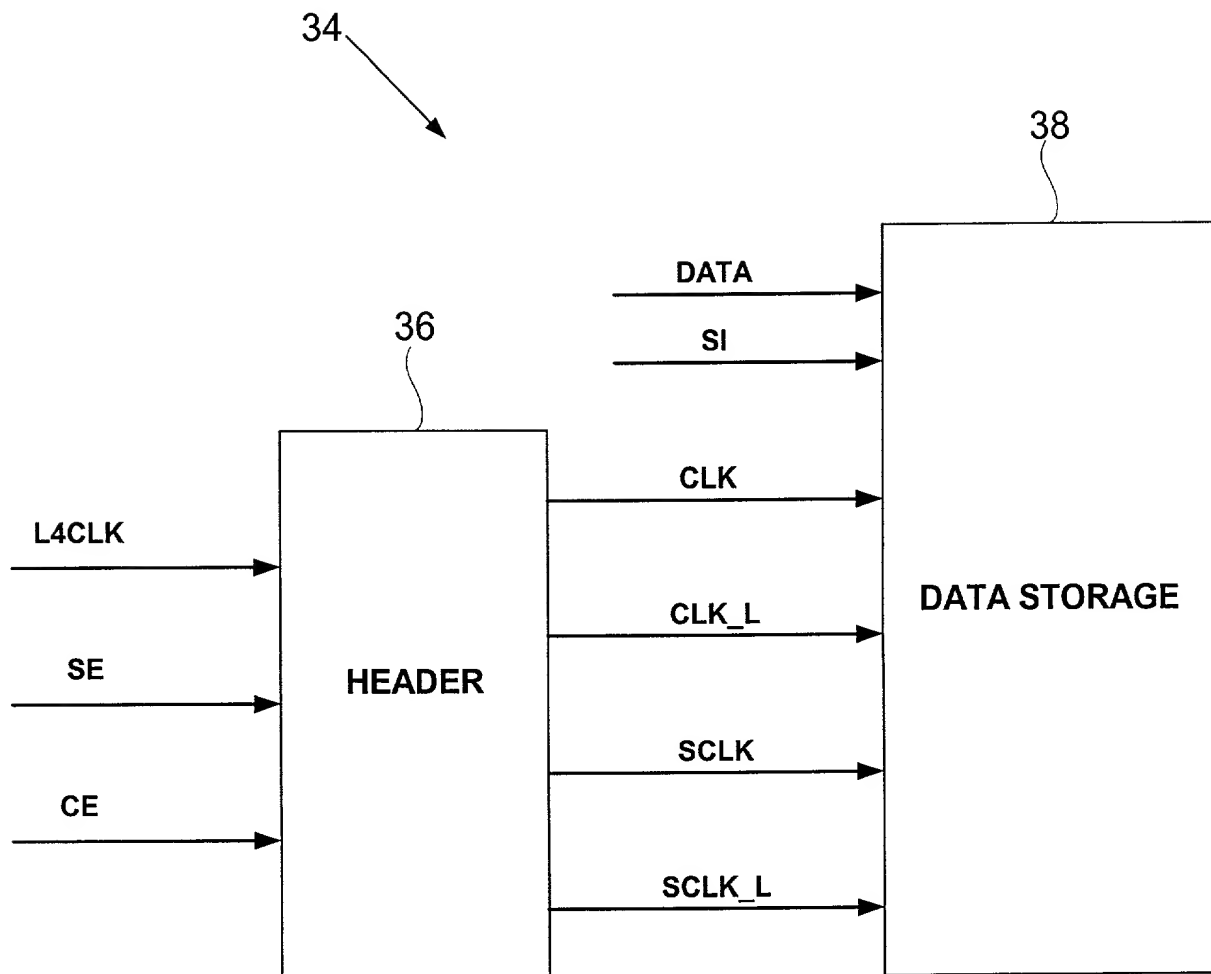


FIGURE 2 (prior art)



**FIGURE 3**



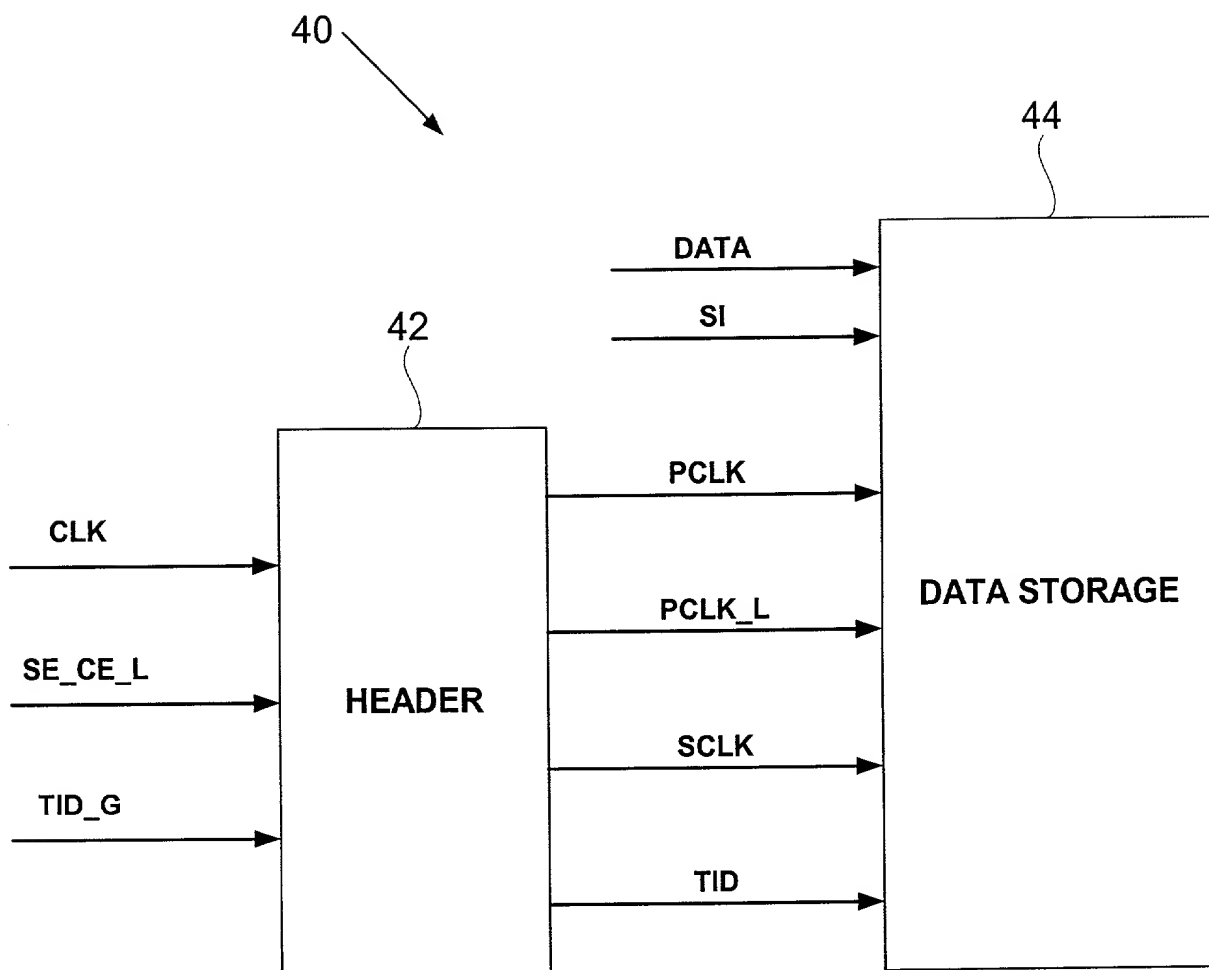



Express Mail Label No.

Page 1 of 3

Docket No.  
P5243/03226.049001**Declaration For Patent Application**  
**English Language Declaration****22511**

PATENT TRADEMARK OFFICE

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**THREAD SWITCH CIRCUIT DESIGN AND SIGNAL ENCODING FOR VERTICAL THREADING**

the specification of which

(check one)

☒ is attached hereto.☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International

Application Number \_\_\_\_\_

and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

(Number)

(Country)

(Day/Month/Year Filed)



(Number)

(Country)

(Day/Month/Year Filed)



(Number)

(Country)

(Day/Month/Year Filed)



I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional

_____	_____
(Application Serial No.)	(Filing Date)

_____	_____
(Application Serial No.)	(Filing Date)

_____	_____
(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, CFR Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor <b>Gajendra P. SINGH</b>	
Sole or first inventor's signature <i>Gajendra P. Singh</i>	Date <i>NOV 09, 2000</i>
Residence <b>1045 W. Washington Avenue, #9, Sunnyvale, CA 94086</b>	
Citizenship <b>India</b>	
Post Office <b>1045 W. Washington Avenue, #9, Sunnyvale, CA 94086</b>	

Full name of second inventor, if any <b>Joseph I. CHAMDANI</b>	
Second inventor's	Date
Residence <b>351 Manly Court, Santa Clara, CA 95051</b>	
Citizenship <b>Indonesia</b>	
Post Office <b>351 Manly Court, Santa Clara, CA 95051</b>	

Full name of third inventor, if any <b>Renu RAMAN</b>	
Third inventor's signature	Date
Residence	
Citizenship <b>USA</b>	
Post Office	

Full name of fourth inventor, if any <b>Rabin A. SUGUMAR</b>	
Fourth inventor's signature	Date
Residence <b>844 Louise Drive, Sunnyvale, CA 94087</b>	
Citizenship <b>India</b>	
Post Office <b>844 Louise Drive, Sunnyvale, CA 94087</b>	

Page 3 of 3

Full name of sole or first inventor <b>Gajendra P. SINGH</b>	
Sole or first inventor's signature	Date
Residence <b>1045 W. Washington Avenue, #9, Sunnyvale, CA 94086</b>	
Citizenship <b>India</b>	
Post Office <b>1045 W. Washington Avenue, #9, Sunnyvale, CA 94086</b>	

Full name of second inventor, if any <b>Joseph I. CHAMDANI</b>	
Second inventor's	Date
<i>J. I. Chaudani</i> <b>10/19/2000</b>	
Residence <b>351 Manly Court, Santa Clara, CA 95051</b>	
Citizenship <b>Indonesia</b>	
Post Office <b>351 Manly Court, Santa Clara, CA 95051</b>	

Full name of third inventor, if any <b>Renu RAMAN</b>	
Third inventor's signature	Date
Residence	
Citizenship <b>USA</b>	
Post Office	

Full name of fourth inventor, if any <b>Rabin A. SUGUMAR</b>	
Fourth inventor's signature	Date
Residence <b>844 Louise Drive, Sunnyvale, CA 94087</b>	
Citizenship <b>India</b>	
Post Office <b>844 Louise Drive, Sunnyvale, CA 94087</b>	

Full name of sole or first inventor <b>Gajendra P. SINGH</b>	
Sole or first inventor's signature	Date
Residence <b>1045 W. Washington Avenue, #9, Sunnyvale, CA 94086</b>	
Citizenship <b>India</b>	
Post Office <b>1045 W. Washington Avenue, #9, Sunnyvale, CA 94086</b>	

Full name of second inventor, if any <b>Joseph I. CHAMDANI</b>	
Second inventor's	Date
Residence <b>351 Manty Court, Santa Clara, CA 95051</b>	
Citizenship <b>Indonesia</b>	
Post Office <b>351 Manty Court, Santa Clara, CA 95051</b>	

Full name of third inventor, if any <b>Renu RAMAN</b>	
Third inventor's signature <b>9</b>	Date <b>11/6/00</b>
Residence <b>962, TERRACE DR, LOS ALTOS, CA-94024</b>	
Citizenship <b>USA</b>	
Post Office	

Full name of fourth inventor, if any <b>Rabin A. SUGUMAR</b>	
Fourth inventor's signature	Date
Residence <b>844 Louise Drive, Sunnyvale, CA 94087</b>	
Citizenship <b>India</b>	
Post Office <b>844 Louise Drive, Sunnyvale, CA 94087</b>	

Full name of sole or first inventor <b>Gajendra P. SINGH</b>	
Sole or first inventor's signature	Date
Residence <b>1045 W. Washington Avenue, #9, Sunnyvale, CA 94086</b>	
Citizenship <b>India</b>	
Post Office <b>1045 W. Washington Avenue, #9, Sunnyvale, CA 94086</b>	

Full name of second inventor, if any <b>Joseph L. CHAMDANI</b>	
Second inventor's	Date
Residence <b>351 Manly Court, Santa Clara, CA 95051</b>	
Citizenship <b>Indonesia</b>	
Post Office <b>351 Manly Court, Santa Clara, CA 95051</b>	

Full name of third inventor, if any <b>Renn RAMAN</b>	
Third inventor's signature	Date
Residence	
Citizenship <b>USA</b>	
Post Office	

Full name of fourth inventor, if any <b>Rabin A. SUGUMAR</b>	
Fourth inventor's signature <i>Rabin A. Sugumar</i>	Date <i>10/24/2000</i>
Residence <b>844 Louise Drive, Sunnyvale, CA 94087</b>	
Citizenship <b>India</b>	
Post Office <b>844 Louise Drive, Sunnyvale, CA 94087</b>	

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**  
**POWER OF ATTORNEY**

Docket No.  
P5243/03226.049001

Name of Applicant: **SUN MICROSYSTEMS, INC.**  
Address of Applicant: **901 San Antonio Road, MS-PALO1-521**  
**Palo Alto, California 94303**

Title: **THREAD SWITCH CIRCUIT DESIGN AND SIGNAL ENCODING FOR**  
**VERTICAL THREADING**

Serial No., if Any:

Filed:

**TO THE ASSISTANT COMMISSIONER FOR PATENTS**

The Assistant Commissioner for Patents  
Washington, D.C. 20231

Honorable Sir:

I hereby appoint:

**Jonathan P. Osha, Reg. No. 33,986; Alan D. Rosenthal, Reg. No. 27,833; Richard A. Fagin, Reg. No. 39,182; David E. Mixon, Reg. No. 43,809; Adenike Adewuya, Reg. No. 42,254; Thomas K. Scherer, Reg. No. 45,079; Scott W. Hejny, Reg. No. 45,882; Y. Renee Alsandor, Reg. No. 45,883; Jeffrey S. Bergman, Reg. No. 45,925, of ROSENTHAL & OSHA L.L.P.; and**

**Kenneth Olsen, Reg. No. 26,493; Timothy J. Crean, Reg. No. 37,116; Robert S. Hauser, Reg. No. 37,847; Joseph T. FitzGerald, Reg. No. 33,881; Alexander E. Silverman, Reg. No. 37,940; Christine S. Lam, Reg. No. 37,489; Anirma Rakshpal Gupta, Reg. No. 38,275; Sean P. Lewis, Reg. No. 42,798; Michael J. Schallop, Reg. No. 44,319; Bernice B. Chen, Reg. No. 42,403; Kenta Suzue, Reg. No. 45,145; Noreen Krall, Reg. No. 39,734; Richard J. Lutton, Jr., Reg. No. 39,756; Monica Lee, Reg. No. 40,696; Marc D. Foodman, Reg. No. 34,110, and Naren Chaganti, Reg. No. 44,602, of SUN MICROSYSTEMS, INC.**

as principal attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Please direct all future correspondence to:

**Jonathan P. Osha**  
**ROSENTHAL & OSHA L.L.P.**  
**700 Louisiana Street, Suite 4550**  
**Houston, Texas 77002**

Telephone: (713) 228-8600  
Facsimile: (713) 228-8778

By:



**Kenneth Olsen, Reg. No. 26,493**  
**Vice President Intellectual Property**  
**Sun Microsystems, Inc.**  
**901 San Antonio Road, M/S PAL01-521**  
**Palo Alto, Ca 94303**

Dated: \_\_\_\_\_

**OCT 23 2000**